

# Globalyst 520



Globalyst 520



“Value-486  
desktop.”

### DIMENSIONS

7.9 kg	<b>Weight</b>	17.4 lb
104 mm	<b>Height</b>	4.1 inches
414 mm	<b>Width</b>	16.3 inches
384 mm	<b>Depth</b>	15.1 inches


486 DESKTOP

0645 55 66 66

for the cost of a local call.

Hours: 9:00am to 6:00pm weekdays

### Features

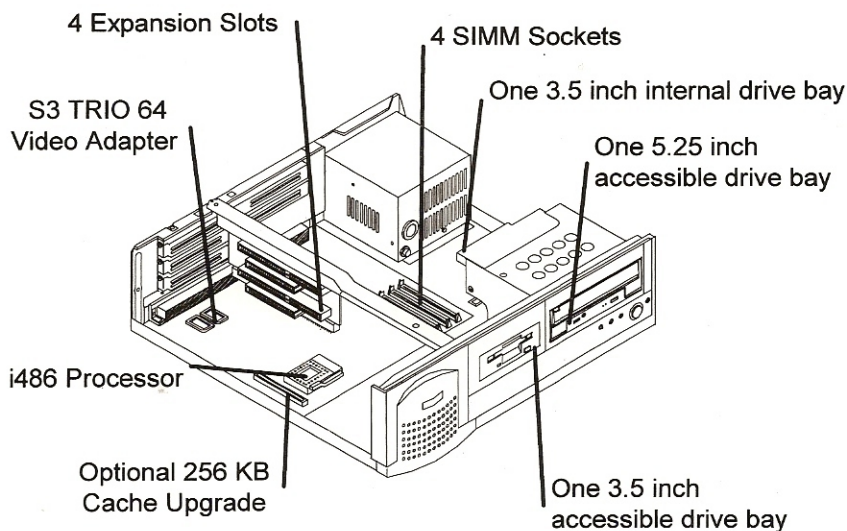

### STANDARD CONFIGURATION INCLUDES:

- DESKTOP CABINET
- MAINBOARD
- 1MB VIDEO MEMORY
- DOS & WINDOWS FOR WORKGROUPS PRE-INSTALLED
- MOUSE
- KEYBOARD
- PC&C VISTUM SHARE SOFTWARE PRE-INSTALLED
- 1.44MB FLEX DISK DRIVE
- ZIF SOCKET FOR FUTURE PENTIUM PROCESSOR TECHNOLOGY
- PLUG & PLAY UTILITIES

### Standard Configurations

Processor	Hard Drive	RAM	Cache	CD ROM	Part No.	Price (£)
4DX2/50	540MB	8MB	None	No	3238-3011	1025
4DX2/66	540MB	8MB	None	No	3238-3021	1095
4DX2/66	850MB	8MB	None	No	3238-3022	1150
4DX4/100	1.08GB	8MB	256KB	No	3238-3031	1475





# Globalyst 520

## Base Models

Description	Part No.	Price (£)
DOS, Windows, Mouse	3238-2000	490
DOS, Windows for Workgroups, Mouse	3238-3000	500

## Processors

486 DX2/50	3238-F005	80
486 DX2/66	3238-F006	150
486 DX4/100	3238-F007	310

## Memory

SIMMS - 4MB - non-parity	3238-F122	105
SIMMS - 8MB - non-parity	3238-F123	210
SIMMS - 16MB - non-parity	3238-F124	420
Board - 256KB cache add-on	3238-F114	50
Video - 1MB Upgrade	3238-F078	35

## Keyboard

UK English	3238-F442	20
------------	-----------	----

## Storage Media

3.5 inch Flex Disk Drive - 1.44 MB	3238-F702	30
Hard Disk Drive - 540 IDE	3238-F741	185
Hard Disk Drive - 850MB IDE	3238-F742	240
Hard Disk Drive - 1.08GB IDE	3238-F743	355
Hard Disk Drive - 1GB SCSI*	3238-F750	495
Hard Disk Drive - 2GB SCSI*	3238-F751	820
Tape Drive - 2GB SCSI DAT	3238-F762	820
CD ROM - 600MB SCSI* (quad speed)	3238-F598	155
CD ROM - 600MB IDE (quad speed)	3238-F597	125
Adapter Board - PCI/SCSI	3238-F063	175

## Business Audio

Adapter Board - 16 bit Sound Blaster compatible	3238-F226	70
Talkback stereo speakers with integrated microphone	3238-F218	35

## LAN, ISDN & Modems

Adapter Board - ISA Ethernet (SMC8416)	3238-F364	75
Adapter Board - PCI 10/100 Ethernet (SMC9332)	3238-F367	215
Adapter Board - ISA Token Ring (OLICOM 3118)	3238-F388	195
Adapter Board - PCI Token Ring (OLICOM 3136)	3238-F392	235
Adapter Board - PCI Ethernet (SMC8432)	3238-F393	105
Teles ISDN card	3238-F500	420
Modem and software (data & fax: 14.4bps)	3238-F270	210

## PCMCIA

Adapter Board - PCMCIA, 2X rear	3238-F710	185
Adapter Board - PCMCIA, 2X front	3238-F711	185

## Monitors

14 inch VGA mono, standard scan	3298-2131	136
14 inch SVGA colour, 0.39, standard scan	3298-2232	210
14 inch SVGA colour, 0.28, auto scan, DDC, MPR II	3298-2243	245
15 inch ES VGA, 0.28, standard scan, MPR II	6332-0275	340
17 inch, 0.27, digital auto scan, TCO'92,	3298-2286	700
21 inch SVGA colour, 0.28, MPR II	6332-0290	1570

\*All SCSI storage devices require PCI/SCSI adapter board (3238-F063). Please remember to add this to your configuration.

### BASE MODEL INCLUDES:

- DESKTOP CABINET
- MAINBOARD
- 1MB VIDEO MEMORY
- DOS PRE-INSTALLED
- PC&C VISTIUM SHARE SOFTWARE PRE-INSTALLED
- MOUSE
- ZIF SOCKET FOR FUTURE PENTIUM PROCESSOR TECHNOLOGY
- PLUG AND PLAY UTILITIES

### BIOS

- FLASHBIOS; PHOENIX
- PLUG & PLAY

### MEMORY

- SUPPORTS 8 TO 128MB OF 70NS, 72 PIN INDUSTRY STANDARD SIMMS

### SLOTS

- (1) FULL SIZED ISA SLOT
- (1) FULL SIZED PCI SLOT
- (1) FULL SIZED ISA/PCI SLOT
- (1) HALF SIZED ISA SLOT

### VIDEO

- ADVANCED S3 TRIO 64 PCI GRAPHICS CONTROLLER
- 1MB VRAM UPGRADABLE TO 2MB
- MAXIMUM RESOLUTION OF UP TO 1280 x 1024 x 256 COLOURS AT 75Hz REFRESH RATE

### DRIVE BAYS

- (2) 3.5" DRIVE POSITIONS (ONE ACCESSIBLE FOR 1.44MB FLEX DISK DRIVE, ONE INTERNAL BAY)
- (1) ACCESSIBLE 5.25" DRIVE POSITION

### OS CERTIFICATION

- MICROSOFT DOS & WINDOWS
- WINDOWS 95
- WINDOWS FOR WORKGROUPS
- WINDOWS NT
- NOVELL UNIXWARE & NETWARE
- SCO UNIX ODT
- IBM OS/2 & OS/2 WARP