

Globalyst 620



PENTIUM DESKTOP

Globalyst 620



“Value-priced
Pentium processor
with
communications
in mind.”

DIMENSIONS


7.9 kg	Weight	17.4 lb
104 mm	Height	4.1 inches
414 mm	Width	16.3 inches
384 mm	Depth	15.1 inches

0645 55 66 66

for the cost of a local call.

Hours: 9:00am to 6:00pm weekdays

Features

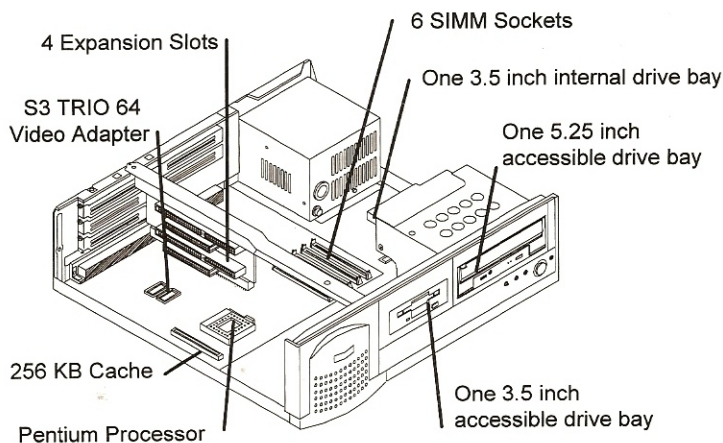

STANDARD CONFIGURATION INCLUDES:

- DESKTOP CABINET
- MAINBOARD
- 1MB VIDEO MEMORY
- DOS & WINDOWS FOR WORKGROUPS PRE-INSTALLED
- MOUSE
- KEYBOARD
- PC&C VISTUUM SHARE SOFTWARE PRE-INSTALLED
- 1.44MB FLEX DISK DRIVE
- ZIF SOCKET FOR FUTURE PENTIUM PROCESSOR TECHNOLOGY
- PLUG & PLAY UTILITIES

Standard Configurations

Processor	Hard Drive	RAM	Cache	CD ROM	Part No.	Price (£)
Pentium 75	540MB	16MB	256KB	No	3248-3053	1610
Pentium 75	850MB	16MB	256KB	No	3248-3054	1665
Pentium 90	850MB	8MB	256KB	No	3248-3061	1745
Pentium 90	1.08GB	16MB	256KB	600MB IDE 4x	3248-3062	2195
Pentium 100	1.08GB	16MB	256KB	No	3248-3071	2275
Pentium 120	1.08GB	16MB	256KB	No	3248-3081	2635



Globalyst 620

	Description	Part No.	Price (£)
Base Models	DOS, Windows, Mouse	3248-2000	630
	DOS, Windows for Workgroups, Mouse	3248-3000	640
Processors	Pentium 75	3248-F001	315
	Pentium 90	3248-F002	605
	Pentium 100	3248-F003	810
	Pentium 120	3248-F004	1170
Memory	SIMMS - 8MB - non-parity	3248-F126	210
	SIMMS - 16MB - non-parity	3248-F127	420
	SIMMS - 32MB - non-parity	3248-F128	840
	SIMMS - 64MB Parity	3248-F113	2010
	Video - 1MB Upgrade	3248-F078	35
Keyboard	UK English	3248-F442	20
Storage Media	3.5 inch Flex Disk Drive - 1.44 MB	3248-F702	30
	Hard Disk Drive - 540 IDE	3248-F741	185
	Hard Disk Drive - 850MB IDE	3248-F742	240
	Hard Disk Drive - 1.08GB IDE	3248-F743	355
	Hard Disk Drive - 1GB SCSI*	3248-F750	495
	Hard Disk Drive - 2GB SCSI*	3248-F751	820
	Tape Drive - 2GB SCSI DAT	3248-F762	820
	CD ROM - 600MB SCSI* (quad speed)	3248-F598	155
	CD ROM - 600MB IDE (quad speed)	3248-F597	125
	Adapter Board - PCI/SCSI	3248-F063	175
	Business Audio	Adapter Board - 16 bit Sound Blaster compatible	3248-F226
Talkback stereo speakers with integrated microphone		3248-F218	35
LAN, ISDN & Modems	Adapter Board - ISA Ethernet (SMC8416)	3248-F364	75
	Adapter Board - PCI 10/100 Ethernet (SMC9332)	3248-F367	215
	Adapter Board - ISA Token Ring (OLICOM 3118)	3248-F388	195
	Adapter Board - PCI Token Ring (OLICOM 3136)	3248-F392	235
	Adapter Board - PCI Ethernet (SMC8432)	3248-F393	105
	Teles ISDN card	3248-F500	420
	Modem and software (data & fax: 14.4bps)	3248-F270	210
PCMCIA	Adapter Board - PCMCIA, 2X rear	3248-F710	185
	Adapter Board - PCMCIA, 2X front	3248-F711	185
Monitors	14 inch VGA mono, standard scan	3298-2131	136
	14 inch SVGA colour, 0.39, standard scan	3298-2232	210
	14 inch SVGA colour, 0.28, auto scan, DDC, MPR II	3298-2243	245
	15 inch ESVGA, 0.28, standard scan, MPR II	6332-0275	340
	17 inch, 0.27, digital auto scan, TCO'92	3298-2286	700
	21 inch SVGA colour, 0.28, MPR II	6332-0290	1570

*All SCSI storage devices require PCI/SCSI adapter board (3248-F063). Please remember to add this to your configuration.

BASE MODEL INCLUDES:

- DESKTOP CABINET
- MAINBOARD
- 1MB VIDEO MEMORY
- 256KB CACHE
- DOS & PC&C VISTUM SHARE SOFTWARE PRE-INSTALLED
- MOUSE
- ZIF SOCKET FOR FUTURE PENTIUM PROCESSOR TECHNOLOGY
- PLUG AND PLAY UTILITIES

BIOS

- FLASHBIOS; PHOENIX
- PLUG & PLAY

MEMORY

- SUPPORTS 8 TO 192MB OF 70NS, 72 PIN INDUSTRY STANDARD SIMMS

SLOTS

- (1) FULL SIZED ISA SLOT
- (1) FULL SIZED PCI SLOT
- (1) FULL SIZED ISA/PCI SLOT
- (1) HALF SIZED ISA SLOT

VIDEO

- ADVANCED S3 TRIO 64 PCI GRAPHICS CONTROLLER
- 1MB VRAM UPGRADABLE TO 2MB
- MAXIMUM RESOLUTION OF UP TO 1280 x 1024 x 256 COLOURS AT 75HZ REFRESH RATE

DRIVE BAYS

- (2) 3.5" DRIVE POSITIONS (ONE ACCESSIBLE FOR 1.44MB FLEX DISK DRIVE, ONE INTERNAL BAY)
- (1) ACCESSIBLE 5.25" DRIVE POSITION

OS CERTIFICATION

- MICROSOFT DOS & WINDOWS
- WINDOWS 95
- WINDOWS FOR WORKGROUPS
- WINDOWS NT
- NOVELL UNIXWARE & NETWARE
- SCO UNIX ODT
- IBM OS/2 & OS/2 WARP