

Globalyst 530



Globalyst 530



“Expansion and value combined.”

DIMENSIONS

| | | |
|---------|---------------|-------------|
| 15.5 kg | Weight | 34 lb |
| 444 mm | Height | 17.5 inches |
| 178 mm | Width | 7.0 inches |
| 419 mm | Depth | 16.5 inches |


486 MINITOWER

0645 55 66 66

for the cost of a local call.

Hours: 9:00am to 6:00pm weekdays

Features

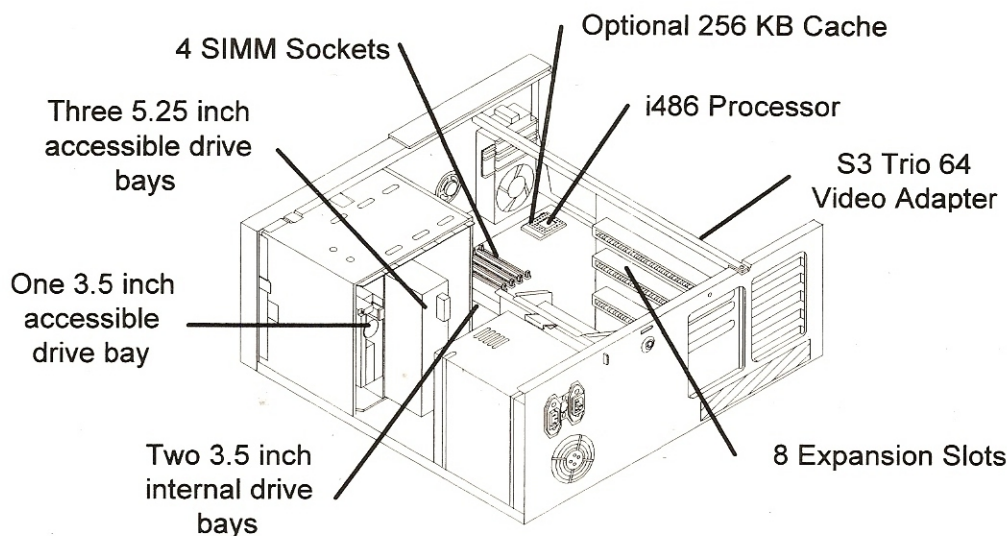

STANDARD CONFIGURATION INCLUDES:

- MINITOWER CABINET
- MAINBOARD
- 1MB VIDEO MEMORY
- DOS & WINDOWS FOR WORKGROUPS PRE-INSTALLED
- MOUSE
- KEYBOARD
- PC&C VISTUUM SHARE SOFTWARE PRE-INSTALLED
- 1.44MB FLEX DISK DRIVE
- ZIF SOCKET FOR FUTURE PENTIUM PROCESSOR TECHNOLOGY
- PLUG & PLAY UTILITIES

Standard Configurations

| Processor | Hard Drive | RAM | Cache | CD ROM | Part No. | Price (£) |
|-----------|------------|-----|-------|--------|-----------|-----------|
| 4DX2/50 | 540MB | 8MB | None | No | 3338-3011 | 1100 |
| 4DX2/66 | 540MB | 8MB | None | No | 3338-3021 | 1170 |
| 4DX2/66 | 850MB | 8MB | None | No | 3338-3022 | 1225 |
| 4DX4/100 | 1.08GB | 8MB | 256KB | No | 3338-3031 | 1550 |



Globalyst 530

| | Description | Part No. | Price (£) |
|---|---|---|-----------|
| Base Models | DOS, Windows, Mouse | 3338-2000 | 565 |
| | DOS, Windows for Workgroups, Mouse | 3338-3000 | 575 |
| Processors | 486 DX2/50 | 3338-F005 | 80 |
| | 486 DX2/66 | 3338-F006 | 150 |
| | 486 DX4/100 | 3338-F007 | 310 |
| Memory | SIMMS - 4MB - non-parity | 3338-F122 | 105 |
| | SIMMS - 8MB - non-parity | 3338-F123 | 210 |
| | SIMMS - 16MB - non-parity | 3338-F124 | 420 |
| | Board - 256KB cache add-on | 3338-F114 | 50 |
| | Video - 1MB Upgrade | 3338-F078 | 35 |
| Keyboard | UK English | 3338-F442 | 20 |
| Storage Media | 3.5 inch Flex Disk Drive - 1.44 MB | 3338-F702 | 30 |
| | Hard Disk Drive - 540 IDE | 3338-F741 | 185 |
| | Hard Disk Drive - 850MB IDE | 3338-F742 | 240 |
| | Hard Disk Drive - 1.08GB IDE | 3338-F743 | 355 |
| | Hard Disk Drive - 1GB SCSI* | 3338-F750 | 495 |
| | Hard Disk Drive - 2GB SCSI* | 3338-F751 | 820 |
| | Tape Drive - 2GB SCSI DAT | 3338-F762 | 820 |
| | CD ROM - 600MB SCSI* (quad speed) | 3338-F598 | 155 |
| | CD ROM - 600MB IDE (quad speed) | 3338-F597 | 125 |
| | Adapter Board - PCI/SCSI | 3338-F063 | 175 |
| | Business Audio | Adapter Board - 16 bit Sound Blaster compatible | 3338-F226 |
| Talkback stereo speakers with integrated microphone | | 3338-F218 | 35 |
| LAN, ISDN & Modems | Adapter Board - ISA Ethernet (SMC8416) | 3338-F364 | 75 |
| | Adapter Board - PCI 10/100 Ethernet (SMC9332) | 3338-F367 | 215 |
| | Adapter Board - ISA Token Ring (OLICOM 3118) | 3338-F388 | 195 |
| | Adapter Board - PCI Token Ring (OLICOM 3136) | 3338-F392 | 235 |
| | Adapter Board - PCI Ethernet (SMC8432) | 3338-F393 | 105 |
| | Teles ISDN card | 3338-F500 | 420 |
| | Modem and software (data & fax: 14.4bps) | 3338-F270 | 210 |
| PCMCIA | Adapter Board - PCMCIA, 2X rear | 3338-F710 | 185 |
| | Adapter Board - PCMCIA, 2X front | 3338-F711 | 185 |
| Monitors | 14 inch VGA mono, standard scan | 3298-2131 | 136 |
| | 14 inch SVGA colour, 0.39, standard scan | 3298-2232 | 210 |
| | 14 inch SVGA colour, 0.28, auto scan, DDC, MPR II | 3298-2243 | 245 |
| | 15 inch ES VGA, 0.28, standard scan, MPR II | 6332-0275 | 340 |
| | 17 inch, 0.27, digital auto scan, TCO'92, | 3298-2286 | 700 |
| | 21 inch SVGA colour, 0.28, MPR II | 6332-0290 | 1570 |

*All SCSI storage devices require PCI/SCSI adapter board (3338-F063). Please remember to add this to your configuration.

BASE MODEL INCLUDES:

- ✓ MINITOWER CABINET
- ✓ MAINBOARD
- ✓ 1MB VIDEO MEMORY
- ✓ DOS PRE-INSTALLED
- ✓ PC&C VISTIUM SHARE SOFTWARE PRE-INSTALLED
- ✓ MOUSE
- ✓ ZIF SOCKET FOR FUTURE PENTIUM PROCESSOR TECHNOLOGY
- ✓ PLUG AND PLAY UTILITIES

BIOS

- ✓ FLASHBIOS; PHOENIX
- ✓ PLUG & PLAY

MEMORY

- ✓ SUPPORTS 8 TO 128MB OF 70NS, 72 PIN INDUSTRY STANDARD SIMMS

SLOTS

- ✓ (5) FULL SIZED ISA SLOTS
- ✓ (3) FULL SIZED PCI SLOTS

VIDEO

- ✓ ADVANCED S3 TRIO 64 PCI GRAPHICS CONTROLLER
- ✓ 1MB VRAM UPGRADABLE TO 2MB
- ✓ MAXIMUM RESOLUTION OF UP TO 1280 x 1024 x 256 COLOURS AT 75HZ REFRESH RATE

DRIVE BAYS

- ✓ (3) 3.5" DRIVE POSITIONS (ONE ACCESSIBLE FOR 1.44MB FLEX DISK DRIVE, TWO INTERNAL BAYS)
- ✓ (3) ACCESSIBLE 5.25" DRIVE POSITIONS

OS CERTIFICATION

- ✓ MICROSOFT DOS & WINDOWS
- ✓ WINDOWS 95
- ✓ WINDOWS FOR WORKGROUPS
- ✓ WINDOWS NT
- ✓ NOVELL UNIXWARE & NETWARE
- ✓ SCO UNIX ODT
- ✓ IBM OS/2 & OS/2 WARP