

Globalyst 730



PENTIUM MINITOWER

Globalyst 730



“The ultimate high performance Pentium.”

DIMENSIONS

15.5 kg	Weight	34 lb
444 mm	Height	17.5 inches
178 mm	Width	7.0 inches
419 mm	Depth	16.5 inches

0645 55 66 66


for the cost of a local call.

Hours: 9:00am to 6:00pm weekdays

STANDARD CONFIGURATION INCLUDES:

- MINITOWER CABINET
- MAINBOARD
- 2MB VIDEO MEMORY
- 256KB SYNCHRONOUS CACHE
- 16 BIT SOUND BLASTER COMPATIBLE ADAPTER CARD
- FRONT BEZEL VOLUME CONTROL, HI FIDELITY INTERNAL MONO SPEAKER & MICROPHONE
- DOS, WINDOWS FOR WORKGROUPS & PC&C
- VISTIUM SHARE SOFTWARE PRE-INSTALLED
- MOUSE
- KEYBOARD
- 1.44MB FLEX DISK DRIVE
- ZIF SOCKET FOR FUTURE PENTIUM PROCESSOR TECHNOLOGY
- PLUG AND PLAY UTILITIES

Features

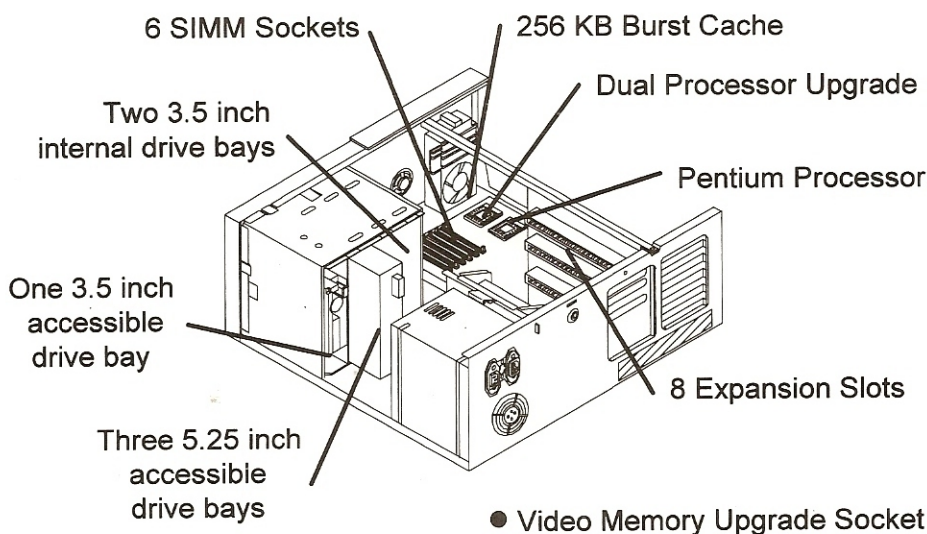

Standard Configurations

Processor	Hard Drive	RAM	Cache	CD ROM	Part No.	Price (£)
Pentium 75	540MB	8MB	256KB	No	3358-3001	2055
Pentium 100	1.08GB	16MB	256KB	No	3358-3002	3020
Pentium 100	1.08GB	16MB	256KB	600MB IDE 4x	3358-3003	3145
Pentium 133	1.6GB	16MB	256KB	No	3358-3004	POA



Globalyst 730

	Description	Part No.	Price (£)
Base Models	DOS, Windows, Mouse	3358-2000	1165
	DOS, Windows for Workgroups, Mouse	3358-3000	1175
Processors	Pentium 75	3358-F001	315
	Pentium 100	3358-F003	810
	Pentium 133	3358-F008	POA
Memory	SIMMS - 8MB Parity	3358-F110	290
	SIMMS - 16MB Parity	3358-F111	580
	SIMMS - 32MB Parity	3358-F112	1160
	SIMMS - 64MB Parity	3358-F113	2010
	Video - 2MB Upgrade	3358-F077	67
	Board - 1MB cache add-on	3358-F117	POA
Keyboard	UK English	3358-F442	20
Storage Media	3.5 inch Flex Disk Drive - 1.44MB	3358-F702	30
	Hard Disk Drive - 540MB IDE	3358-F741	185
	Hard Disk Drive - 850MB IDE	3358-F742	240
	Hard Disk Drive - 1.08GB IDE	3358-F743	355
	Hard Disk Drive - 1.66GB IDE	3358-F745	POA
	Hard Disk Drive - 1.0GB SCSI*	3358-F750	495
	Hard Disk Drive - 2.0GB SCSI*	3358-F751	820
	CD ROM- 600MB IDE (quad speed)	3358-F597	125
	CD ROM- 600MB SCSI* (quad speed)	3358-F598	155
	Tape Drive - 2.0GB SCSI* DAT	3358-F762	820
	Adapter Board - PCI/SCSI	3358-F063	175
	Business Audio	Talkback stereo speakers with integrated microphone	3358-F218
LAN, ISDN & Modems	Adapter Board - ISA Ethernet LAN	3358-F364	75
	Adapter Board - PCI 10/100 Ethernet	3358-F367	215
	Adapter Board - ISA Token Ring	3358-F388	195
	Adapter Board - PCI Token Ring	3358-F392	235
	Adapter Board - PCI Ethernet	3358-F393	105
	Teles ISDN card	3358-F500	420
	Modem and software (data & fax: 14.4bps)	3358-F270	210
PCMCIA	Adapter Board - PCMCIA, 2X rear	3358-F710	185
	Adapter Board - PCMCIA, 2X front	3358-F711	185
Monitors	14 inch VGA mono, standard scan	3298-2131	136
	14 inch SVGA colour, 0.39, standard scan	3298-2232	210
	14 inch SVGA colour, 0.28, auto scan, DDC, MPR II	3298-2243	245
	15 inch ES VGA, 0.28, standard scan, MPR II	6332-0275	340
	17 inch, 0.27, digital auto scan, TCO'92,	3298-2286	700
	21 inch colour	6332-0290	1570

*All SCSI storage devices require PCI/SCSI adapter board (3358-F063). Please remember to add this to your configuration.

BASE MODEL INCLUDES:

- MINITOWER CABINET
- MAINBOARD
- 2MB VIDEO MEMORY
- 256KB SYNCHRONOUS CACHE
- 16 BIT SOUND BLASTER COMPATIBLE ADAPTER CARD
- FRONT BEZEL VOLUME CONTROL, HI FIDELITY INTERNAL MONO SPEAKER & MICROPHONE
- DOS & PC&C VISTIUM SHARE SOFTWARE PRE-INSTALLED
- MOUSE
- ZIF SOCKET FOR FUTURE PENTIUM PROCESSOR TECHNOLOGY
- PLUG AND PLAY UTILITIES

BIOS

- FLASHBIOS; PHOENIX
- PLUG & PLAY

MEMORY

- SUPPORTS 8 TO 192MB OF 70NS, 72 PIN INDUSTRY STANDARD SIMMS

SLOTS

- (6) FULL SIZED ISA SLOTS
- (2) FULL SIZED PCI SLOTS

VIDEO

- PCI LOCAL BUS S3 968 VIDEO CONTROLLER
- 2MB VRAM UPGRADABLE TO 4MB
- MAXIMUM RESOLUTION OF UP TO 1600 x 1200 x 64,000 COLOURS AT 75Hz REFRESH RATE

DRIVE BAYS

- (3) 3.5" DRIVE POSITIONS (ONE ACCESSIBLE FOR 1.44MB FLEX DISK DRIVE, TWO INTERNAL BAYS)
- (3) ACCESSIBLE 5.25" DRIVE POSITIONS

OS CERTIFICATION

- MICROSOFT DOS & WINDOWS
- WINDOWS 95
- WINDOWS FOR WORKGROUPS
- WINDOWS NT
- NOVELL UNIXWARE & NETWARE
- SCO UNIX ODT
- IBM OS/2 & OS/2 WARP